SIDE	DATE	DESCRIPTION	APPROVER
1 △			
2 △			

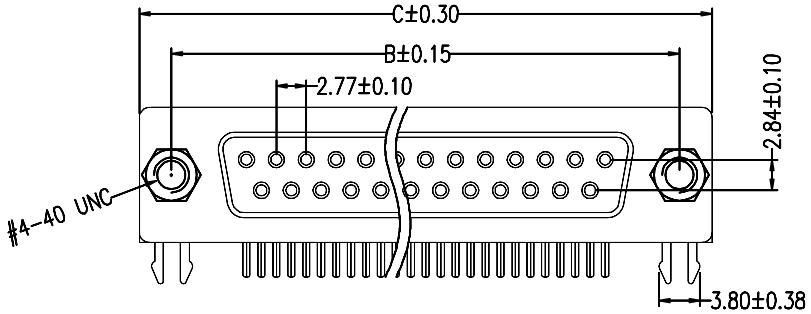

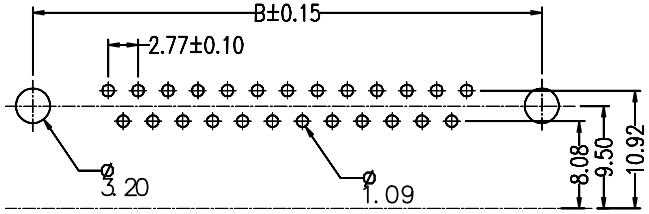

P.C.B. PLYOUT

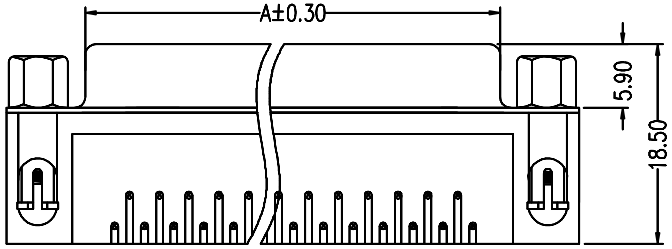

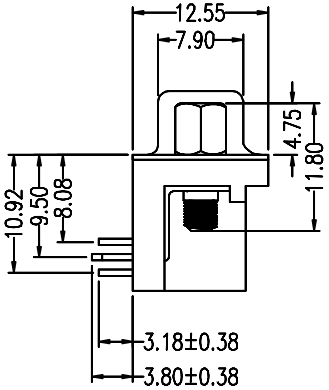

PIN	A	B	C
9	16.30	24.99	30.80
15	24.60	33.30	39.20
25	38.30	47.04	53.10
37	54.80	63.50	69.34

MATERIAL:
1.Insulator:PBT+30%Glass Fiber (UL94V-0)
2.Contact:Brass
3.Contact Plated:Gold Flash over Tin Or Glod Plated Or Tin Plated
4.Shell:Steel,Nickel Plated
SPECIFICATION
1.Current Rating:5 AMPS
2.Insulation Resistance: 5000MΩ MIN. At 500VDC
3.Dielectric Strength: 500V for One minute
4.Operation Temperature: -55° C~+105° C.

	[illegible]		.0±0.25 .00±0.20 .000±0.05	.0°±1.0° .00°±0.5° .000°±0.1°	东莞市颖鑫电子科技有限公司		
	1 : 1				mm		DR-S
	A/1						
	A/0						
			Kr				